
COMPUWARE
— TECHNOLOGY INC. —

Server Motherboard

# CA-SZF-A2L

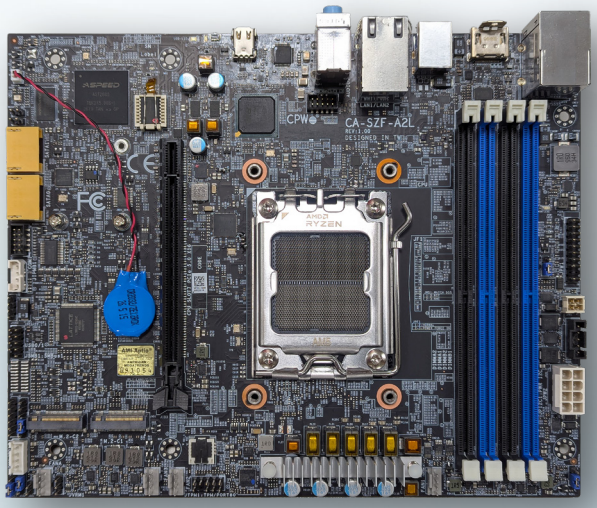

⚠ Product details and images may change without notice.

## KEY FEATURES

- 9" x 7.25" FlexATX
- AMD EPYC 4005/4004 series or Ryzen 9000/7000 series processor
- DDR5 5600MT/s 192GB
- 2 x GbE LAN Ports Intel® Ethernet Controller I350
- Onboard Video & Realtek HD Audio Support

| MAIN BOARD | |
|---|---|
| Form Factor | FlexATX |
| Dimension | 9" x 7.25" |

| PROCESSOR | |
|---|---|
| CPU | AMD EPYC 4005/4004 series or Ryzen 9000/7000 series processor, socket AM5 |
| CPU TDP | Up to 170W |

| SYSTEM MEMORY | |
|---|---|
| Memory | 1 x DDR5 up to 5600MT/s 192GB, support non-ECC and ECC UDIMM in 4 slot |
| Memory Voltage | 1.1V |

| PCIe | |
|---|---|
| Full-length Slot | 1 x PCIe 5.0 x 16 slot, support x 16 or x8x8 |
| M.2 Slot | 1 x M.2 M Key (22110) PCIe 5.0 x 4<br>1 x M.2 M Key (2280) PCIe 5.0 x 4 |

| CONNECTOR | |
|---|---|
| Fan Connector | 4 x fan header (dual cooling zone) |
| Power Connector | 12 DC input: 8 pin (2x4) & 4 pin ATX connector |

| INPUT/ OUTPUT | |
|---|---|
| Networking | 2 x GbE LAN ports thru Intel I350-AM4 LAN chip |
| Video | 1 x HDMI 2.1<br>1 x USB type C (DP)<br>1 x mini-DP thru AST2600 |
| Audio | Realtek ALC 888S HD Audio<br>3 x rear audio jacks<br>1 x front audio header (Line-out / Mic-in) |
| USB | 2 x USB 3.2 Gen2 type A (Rear)<br>1 x USB 3.2 Gen1 type A (Rear)<br>1 x USB 3.2 Gen2 type C *(1) (Rear)<br>2 x USB 2.0 thru internal header<br>*(1).The same physical USB Type C port listed in the video section supports both DisplayPort (DP) and USB 3.2 Gen 2 data transfer. |
| SATA | 2 x SATA3 6Gb/s ports |
| Serial Port | 1 x RS-232 header |
| TPM 2.0 | Onboard |
| Management | 1 x BMC via RJ45 (support CPLD remote AC on/off, remote clear CMOS)<br>IPMI 2.0 w/dedicated LAN |

| CERTIFICATIONS |
|---|
| CE/FCC Class B |

**Compuware Technology Inc.**

Tel: 886-2-8226-3936 Address: 5F., No. 232, Liancheng Rd., Zhonghe Dist., New Taipei City 235, Taiwan (R.O.C.)

www.compuware-us.com